


**FIGURE 7501 - Beam Connector**

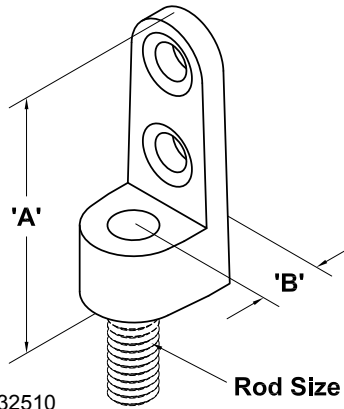


Finish: Plain  
 Per: MSS SP-58, type 34  
 Material: Malleable Iron,  
 ASTM A47 Grade 32510

Hanger rod not included

Catalog Number	Rod Size	A	B
FNW7501PC	3/8"-16	2.19"	0.56"

Rod Size	Finish	Max. Load	Wt. (Oz.)
3/8"-16	Plain	250 Lbs.	1.80

**FIGURE 7502 - Beam Ceiling Flange**

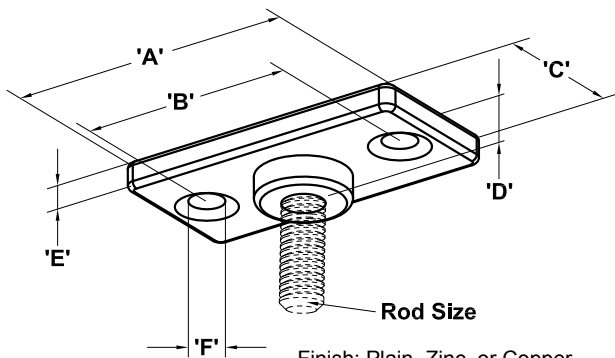

Finish: Plain, Zinc, or Copper  
 Material: Malleable Iron,  
 ASTM A47 Grade 32510


Hanger rod not included

Rod Size	A	B	C	D
3/8"-16	2.75"	2.00"	1.38"	0.50"
1/2"-13	2.75"	2.00"	1.38"	0.50"

Rod Size	E	F	Wt. (Oz.)
3/8"-16	0.25"	0.31"	2.96
1/2"-13	0.25"	0.31"	2.72

Catalog Number	Finish	Rod Size	Max. Load (Lbs.)
FNW7502PC	Plain	3/8"-16	180
FNW7502ZC	Zinc	3/8"-16	180
FNW7502CC	Copper	3/8"-16	180
FNW7502PD	Plain	1/2"-13	180
FNW7502ZD	Zinc	1/2"-13	180
FNW7502CD	Copper	1/2"-13	180

**FIGURE 7701 - Pipe Support**

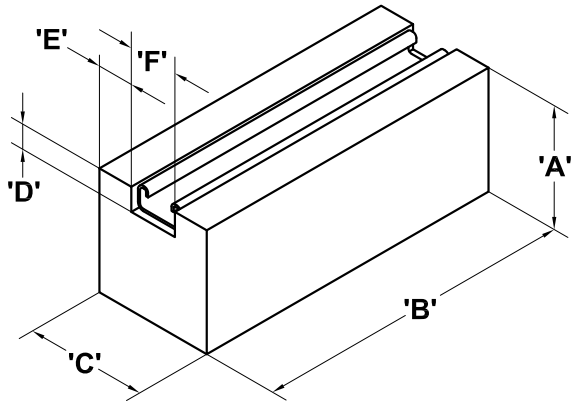

Maximum Load: 50 lbs.  
 Height: 4 or 6 inches

**Components**

**Ethafoam® 400 plank** - The closed-cell medium density black polyethylene foam offers excellent strength, resistance to creep under loadings up to 5.0 psi, vibration & shock absorbency and water resistance characteristics. Ethafoam HS 45 has successfully passed MVSS 302 flammability testing and meets or exceeds the requirements for U.S. Federal Standard PPP-C-1752C, Type III.

Ethafoam® is a registered trademark of Sealed Air Corporation (US).

Physical Properties	Test Method	Direction	Value
Density	D3575, Suffix W, Method B	N/A	3.9 pcf
Compression Set	ASTM D 3575, Suffix B	Vertical	<15%
Compression Creep @ 5.0 psi (1000 hr/72 F)	ASTM D 3575, Suffix BB	Vertical	<10%
Thermal Stability	ASTM D 3575, Suffix S	N/A	<1%
Water Absorption	ASTM D 3575, Suffix L	N/A	<0.2 lb/sq ft

**14 Gauge Strut Channel** - The 14 gauge strut channel is cold roll-formed from high quality carbon steel. The channel finish is hot dipped mill galvanized. The raw steel used conforms to ASTM 570 GR 33 and ASTM A653.

**Bondmaster Instaweld 34-3378** - This adhesive is a sprayable heat & moisture-resistant hot melt adhesive. It has a 350°F melting point and is applied by a nozzle applicator during the manufacturing process. It conforms to MS-CC926.

Catalog Number	A	B	C	D	E	F
FNW7701PP	4.00	10.50	4.00	0.8125	1.1875	1.625
FNW7701UP	6.00	10.50	4.00	0.8125	1.1875	1.625