

# FIGURE X451 FORGED BRONZE BALL VALVES



LOW LEAD COMPLIANT 2 PC FULL PORT 600 WOG

## FEATURES

- 600 WOG
- 150 WSP
- Full port
- NSF 61 and NSF 372 (UL) Certified
- Sweat ends (ANSI B16.18)
- Forged bronze body and endcap
- 100% electronically tested in open and closed position at 80 PSI
- Meets MSS SP-110 standards
- Blowout-proof stem
- Dual O-ring
- Adjustable packing



**Not for Direct Buried Service**


## ACCESSORIES (SOLD SEPARATELY)

- Lock Lever Kit (1/2"~2")
- Stem Extension Kit (1/2"~2")
- Tee Handle Kit (1/2"~1")
- Oval Handle Kit (1/2"~2")
- Memory Stop Kit (1/2"~2")
- Stainless Handle (1/2"~2")

## FIGURE NUMBER MATRIX

FNW X451	Size	
	D = 1/2"	H = 1-1/4"
	F = 3/4"	J = 1-1/2"
	G = 1"	K = 2"

## PRESSURE/TEMPERATURE

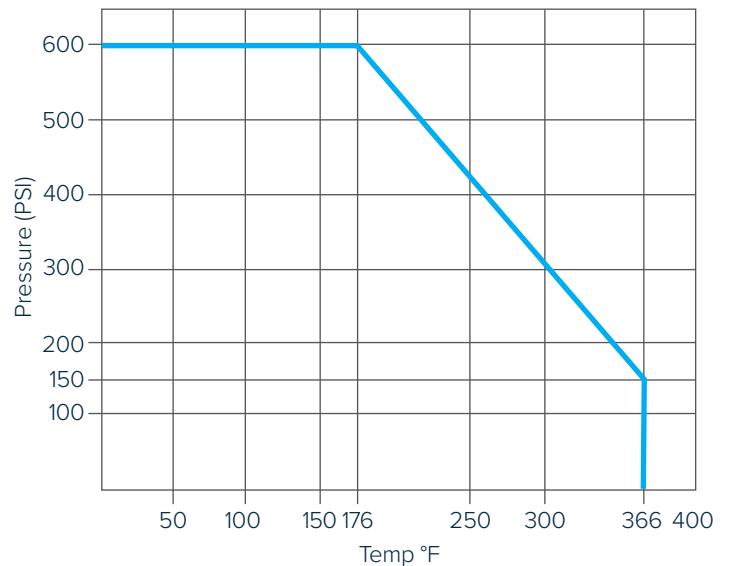

## KIT CODES

Product Type	Size
Locking Handle = LHK	1/4"~1/2" = BD
Stem Extension = SE	3/4"~1" = FG
Tee Handle = THK	1-1/4"~1-1/2" = HJ
Oval Handle = OHK	2" = K
Memory Stop = MSK	
Stainless Handle = SSHK	


*Note: The figure X451 uses the same accessories as the 420.*

# FIGURE X451 FORGED BRONZE BALL VALVES



LOW LEAD COMPLIANT 2 PC FULL PORT 600 WOG

## PARTS BREAKDOWN

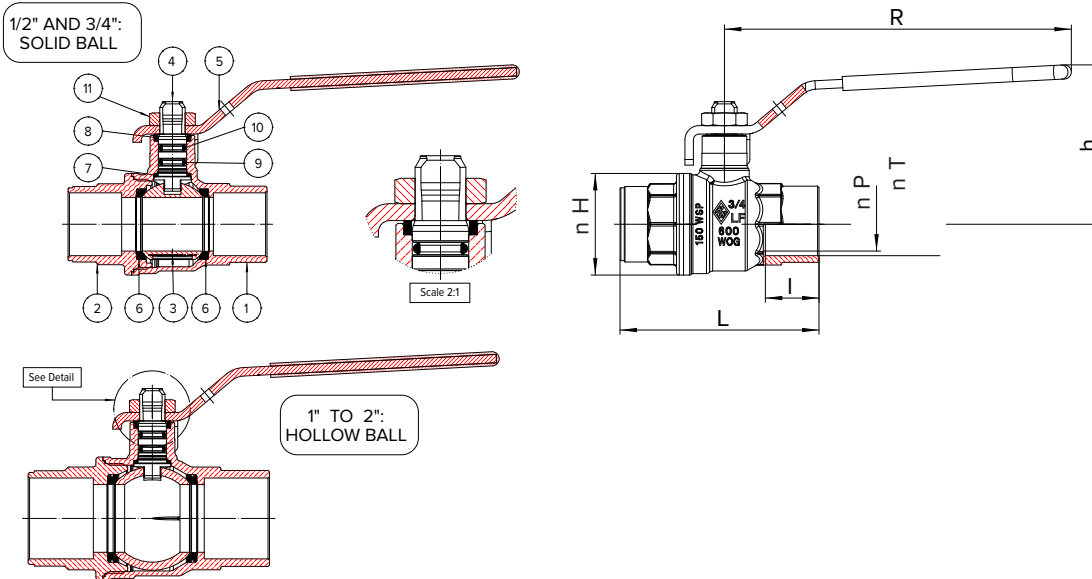

## DIMENSIONS (INCHES)

Size	$\phi P$	$l$	$\phi T$	$L$	$\phi H$	$CH$	$R$	$h$	PSI
1/2"	0.55	0.50	0.63	2.19	1.22	0.87	3.78	1.77	600
3/4"	0.75	0.75	0.88	2.78	1.46	1.06	4.84	2.22	600
1"	0.94	0.91	1.13	3.37	1.76	1.34	4.84	2.32	600
1-1/4"	1.19	0.97	1.38	3.86	2.11	1.69	5.94	2.85	600
1-1/2"	1.50	1.10	1.63	4.48	2.64	1.97	5.94	3.09	600
2"	1.95	1.34	2.13	5.33	3.39	2.44	6.30	3.70	600

## CV & WEIGHTS

Size	$C_v$	Wt. (Lbs)
1/2"	19	0.40
3/4"	34	0.63
1"	45	0.95
1-1/4"	75	1.64
1-1/2"	180	2.33
2"	210	3.80

## PART MATERIALS

Ref #	Description	Material	Qty
1	Body	Bronze	1
2	End Connection	Bronze	1
3	Ball - Solid 1/2" and 3/4"		1
4	Ball - Hollow 1" to 2"	Brass CW 510L	1
5	Stem		1
6	Handle	Steel DD11	1
7	Ball Seat	PTFE	2
8	Thrust Water	PTFE	1
9	Packing Ring	PTFE	1
10	O-Ring	NBR	1
11	O-Ring	FKM	1
12	Nut	Steel CL 04	1