



SECTION A-A

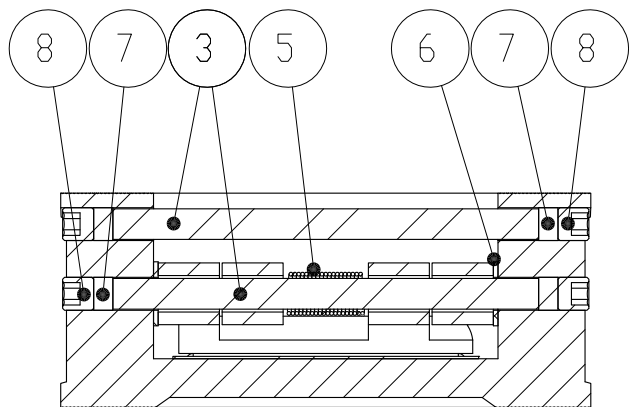

SECTION B-B

Ref. No.	Description	Material	Qty	Remarks
1	Body	Cast Iron ASTM A126 Class B	1	
2	Disc (Door)	Stainless Steel ASTM A351 CF8M	2	
3	Shaft	Stainless Steel SS316	2	
4	Seat	NBR	1	Bonded to Body
5	Spring	Stainless Steel SS316	1-2	Qty 2 on 6 to 12 Inch Valves
6	Washer	PTFE	2-11	Qty According to Size
7	Shaft Seal	NBR	4	
8	Hex Nut	Stainless Steel SS304	4	
9	Eye Bolt	Steel ASTM A193 Grade B7	1	8 Inch and Larger

SIZE	ØD	ØD1	ØD2	L	Cv	Wt. (Lbs)
2	4.13	2.36	1.50	2.13	22	2.87
2-1/2	4.88	2.87	1.89	2.13	33	4.63
3	5.39	3.50	2.52	2.24	52	6.39
4	6.97	4.49	3.43	2.52	87	9.48
5	7.76	5.51	4.02	2.76	133	14.11
6	8.74	6.61	5.12	2.99	198	20.06
8	10.98	8.62	6.97	3.74	335	33.51
10	13.39	10.75	8.50	4.25	562	58.42
12	16.14	12.76	10.24	5.59	781	81.57



FNW™		4120 NE Columbia Blvd Portland, OR 97211 Phone (503)287-8383 Fax (503)281-9677
TITLE/DESCRIPTION		
FIGURE 682 WAFER STYLE DOUBLE-DOOR CHECK		
DATE: 7-29-2010	BY: PEA	NUMBER:
REV: 0	APVD: KMC	682_2-12
CONFIDENTIAL AND PROPRIETARY INFORMATION BELONGING TO FNW VALVE, SUBMITTED FOR THE LIMITED PURPOSE OF PROVIDING INFORMATION ON PRODUCTS AND SYSTEMS. BY RECEIVING THIS DOCUMENT, YOU AGREE NOT TO DISCLOSE SUCH INFORMATION TO OTHERS EXCEPT BY WRITTEN PERMISSION OF FNW VALVE.		
UNITS: INCHES	SCALE: NTS	PAGE 1 OF 1